



Anschlussschema / Schéma de raccordement / Schema di allacciamento
ZNI Elektronischer Intervallschalter

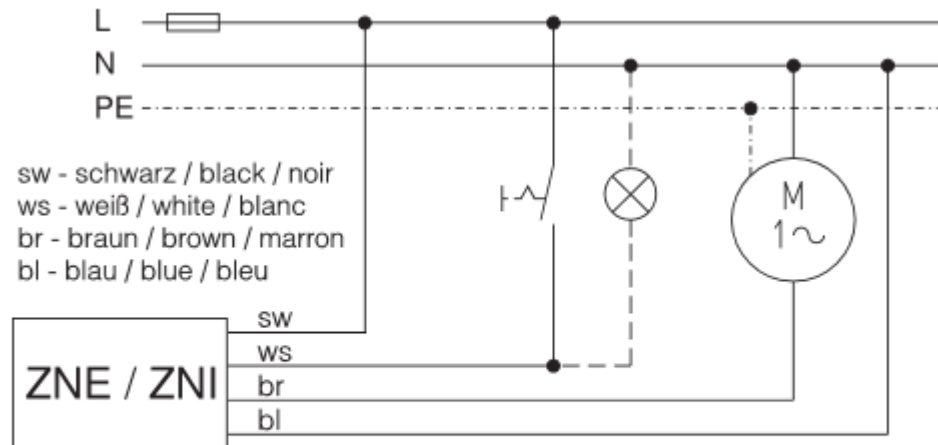

ZNE / ZNI

DIP-Schalter	S1	EV	NA
	0	--	0-21
	1	45	0-21



S1 - S4



DIP - Schalter				
S2	S3	S4	IT	EI
0	0	0	0	0
1	0	0	4	5
0	1	0	4	10
1	1	0	8	10
0	0	1	12	20
1	0	1	12	40
0	1	1	24	40
1	1	1	24	80

EV - Sekunden
 Einschaltverzögerung
 Delayed start
 Démarrage
 temporisé

NA - Minuten
 Nachlauf
 Run on time
 Temporisation

IT - Stunden
 Intervallzeiten
 Interval time
 Durée intervalle

EI - Minuten
 Einschaltzeit
 Running time
 Durée de
 fonctionnement