



E101

EEC.S1 SINGLE PHASE STD. + POT

Connection with cruise control (POT)

L
N 220V

EEC.S1 SINGLE-PHASE STD


POWER

Nº	Signal Señal	Colour Color	Specification Especificación
1	L	Brown Marrón	AC 220V/50Hz
2	N	Blue Azul	AC 220V/50Hz
3	Pe	Yellow-Green Amarillo-Verde	

CONTROL

Nº	Signal Señal	Colour Color	Specification Especificación
1	GND	Blue Azul	
2	Vsp	Yellow Amarillo	0-10V/PWM
3	Vcc	Red Rojo	DC 10V
4	FG	White Blanco	1 Pulse/R

POT

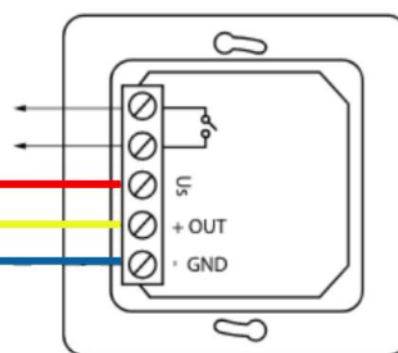

- > Power the EEC fan at 220V using L and N.
- > Remove the EEC fan power supply for the POT via terminal 3 and 1 that supply 10V.
- > Feed the 0-10V control signal from the POT to the EEC fan via terminal 2.



E104

EEC.S1 THREE-PHASE STD. + POT

Connection with cruise control (POT)

EEC.S1 THREE-PHASE STD


POWER

Nº	Signal Señal	Colour Color	Specification Especificación
1	L1	Black Negro	AC380V/50Hz
2	L2	Black Negro	AC380V/50Hz
3	L3	Black Negro	AC380V/50Hz
4	Pe	Yellow-Green Amarillo-Verde	

CONTROL

Nº	Signal Señal	Colour Color	Specification Especificación
1	GND	Blue Azul	
2	Vsp	Yellow Amarillo	0-10 V/PWM
3	Vcc	Red Rojo	DC 10V
4	FG	White Blanco	1 Pulse/R

POT

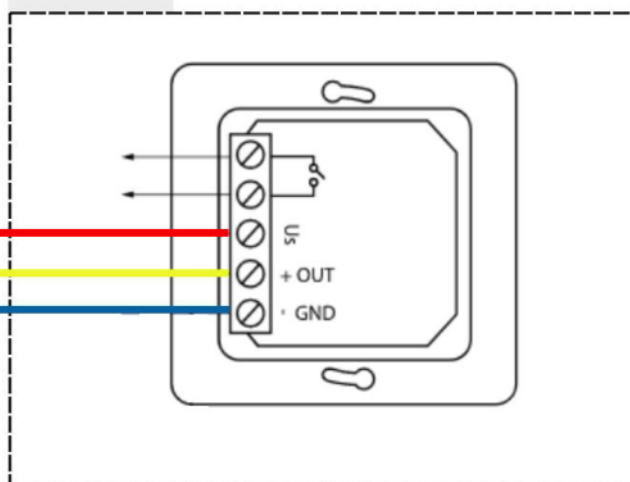

- > Supply the EEC fan with 380V via L1, L2 and L3.
- > Remove the EEC fan power supply for the POT via terminal 3 and 1 that supply 10V.
- > Feed the 0-10V control signal from the POT to the EEC fan via terminal 2.