



EQ / ER 250-4A

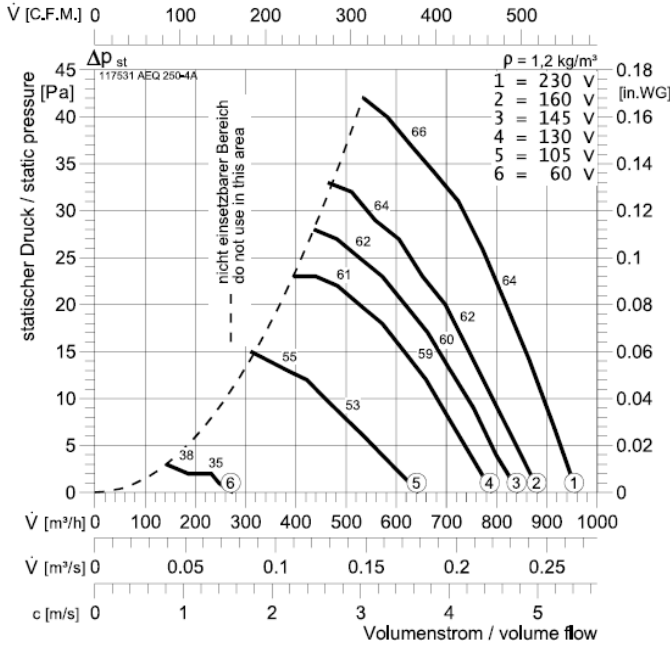

EQ / ER 250-2A

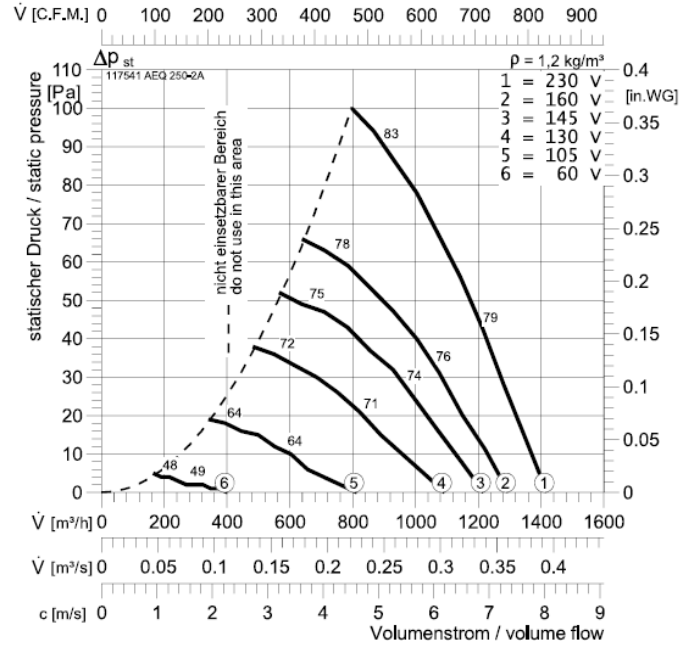

Typ : EQ / ER 250-4A	I_A/I_N : 2,2	ΔdB	L_{WA5}	L_{WA6}
Art.Nr.: 1017900011 / 0617900011	⚠ IP44	$L_{WA \text{ tot}}$	0	0
■ : 3,7/4,2 kg	★ E11	125 Hz	-32	-32
U : 230 V 50 Hz	⚡ GS 1	250 Hz	-19	-19
P_1 : 0,03 kW	🌀 NE 0,5	500 Hz	-10	-10
I_N : 0,13 A	⚡ RPE 02 A	1 kHz	-6	-6
n : 1430 min ⁻¹		2 kHz	-4	-4
C_{400V} : 1 μF		4 kHz	-9	-9
t_R : 50 °C		8 kHz	-22	-22

Typ : EQ / ER 250-2A	I_A/I_N : 2,2	ΔdB	L_{WA5}	L_{WA6}
Art.Nr.: 1017900012 / 0617900012	⚠ IP44	$L_{WA \text{ tot}}$	0	0
■ : 3,9/4,35 kg	★ E11	125 Hz	-43	-43
U : 230 V 50 Hz	⚡ GS 1	250 Hz	-20	-20
P_1 : 0,15 kW	🌀 NE 1,5	500 Hz	-8	-8
I_N : 0,65 A	⚡ RPE 02 A	1 kHz	-6	-6
n : 2450 min ⁻¹		2 kHz	-6	-6
C_{400V} : 4 μF		4 kHz	-8	-8
t_R : 50 °C		8 kHz	-17	-17

