



EQ / ER 450-6A

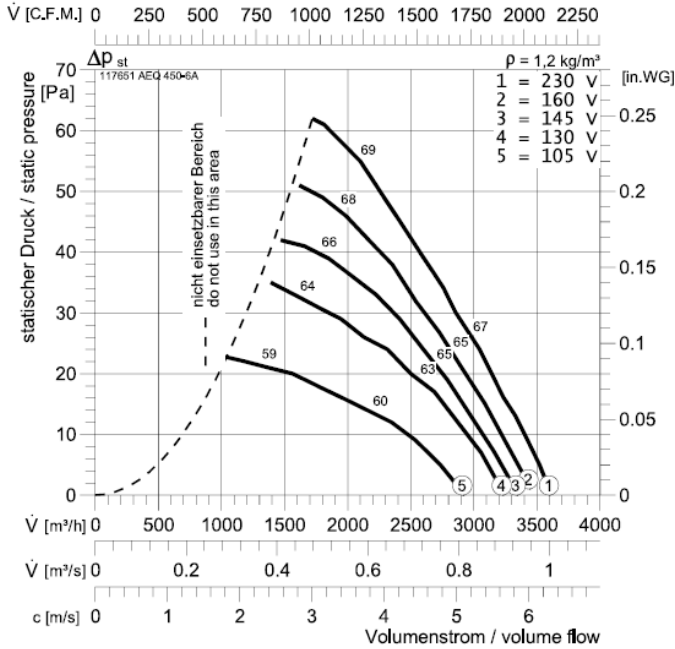

Typ : EQ / ER 450-6A	I_A/I_N : 2,9	ΔdB	L_{WA5}	L_{WA6}
Art.Nr.: 1017900051 / 0617900051	IP 44	$L_{WA \text{ tot}}$	0	0
\square : 12,4/13 kg	E13	125 Hz	-35	-35
U : 230 V 50 Hz	GS 2	250 Hz	-17	-17
P_1 : 0,12 kW	NE 1,5	500 Hz	-10	-10
I_N : 0,56 A	RPE 02 A	1 kHz	-7	-7
n : 940 min ⁻¹		2 kHz	-4	-4
C_{400V} : 4 μF		4 kHz	-9	-9
t_R : 50 °C		8 kHz	-19	-19

DQ / DR 450-6A

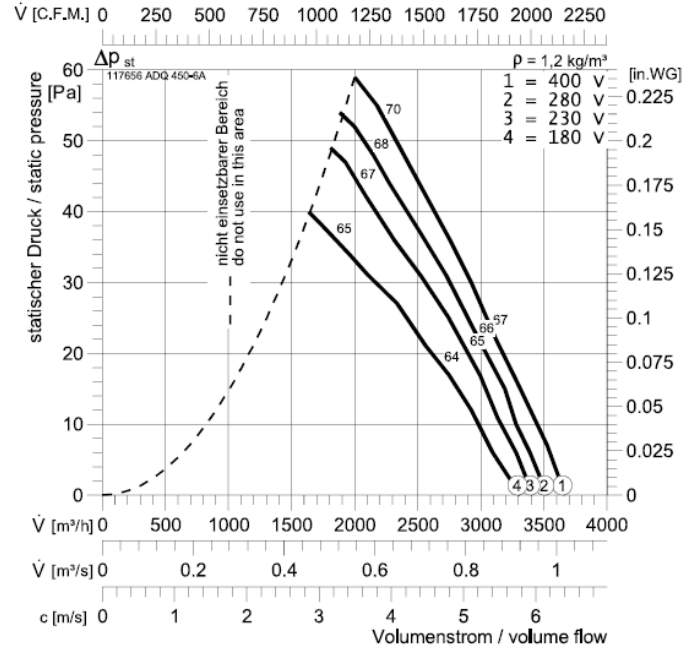

Typ : DQ / DR 450-6A	I_A/I_N : 2,9	ΔdB	L_{WA5}	L_{WA6}
Art.Nr.: 1017900052 / 0617900052	IP 44	$L_{WA \text{ tot}}$	0	0
\square : 12,4/13 kg	E13	125 Hz	-35	-35
U : 400 V 50 Hz	GS 2	250 Hz	-17	-17
P_1 : 0,16 kW	RTD 1,2	500 Hz	-10	-10
I_N : 0,47 A	SAD 9	1 kHz	-7	-7
n : 950 min ⁻¹		2 kHz	-4	-4
C_{400V} : - μF		4 kHz	-9	-9
t_R : 50 °C		8 kHz	-19	-19

