



EQ / ER 450-4A

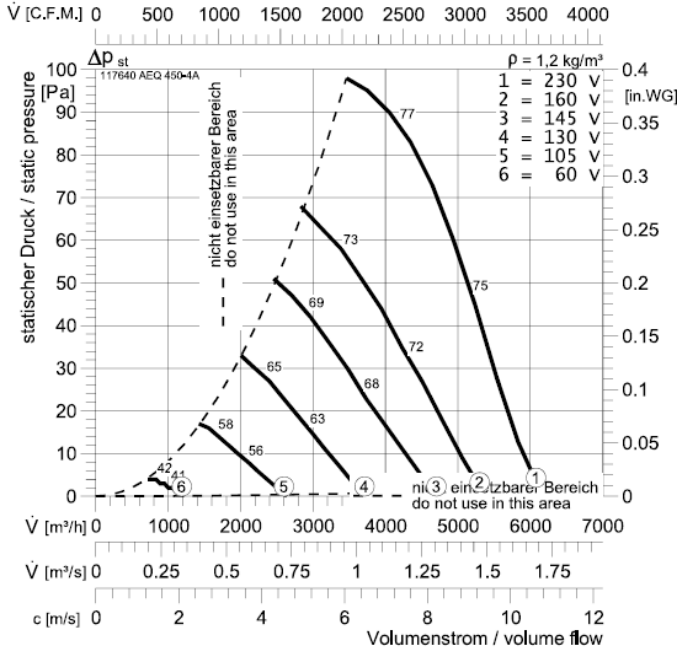

Typ : EQ / ER 450-4A	I_A/I_N :	3,2	Δ dB	L_{WA5}	L_{WA6}
Art.Nr.: 1017900053 / 0617900053		IP 44	$L_{WA\text{tot}}$	0	0
: 10,5/12 kg		E13	125 Hz	-21	-21
U : 230 V 50 Hz		GS 2	250 Hz	-11	-11
P₁ : 0,24 kW		NE 1,5	500 Hz	-8	-8
I_N : 1 A		RPE 06 A	1 kHz	-6	-6
n : 1390 min ⁻¹			2 kHz	-5	-5
C_{400V} : 8 μ F			4 kHz	-8	-8
t_R : 50 °C			8 kHz	-15	-15

DQ / DR 450-4A

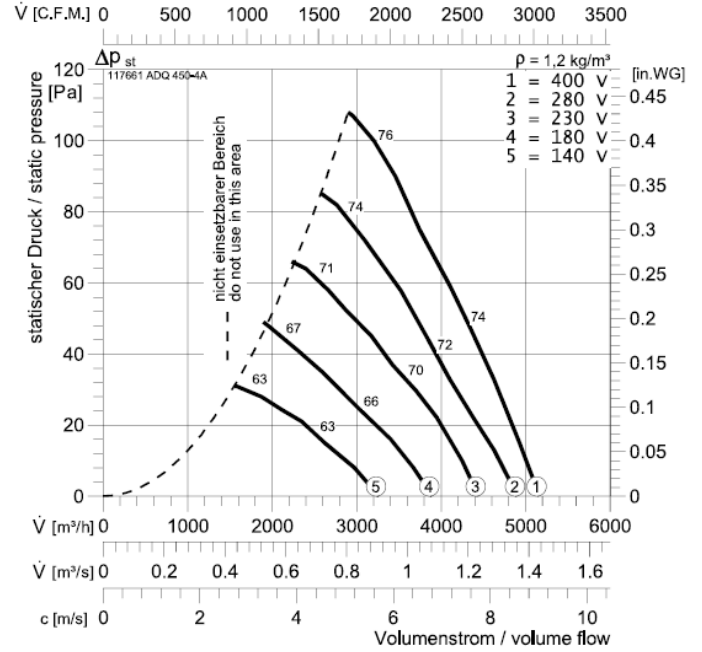

Typ : DQ / DR 450-4A	I_A/I_N :	3,1	Δ dB	L_{WA5}	L_{WA6}
Art.Nr.: 1017900054 / 0617900054		IP 44	$L_{WA\text{tot}}$	0	0
: 12,8/13 kg		DD0b	125 Hz	-16	-16
U : 400 V 50 Hz		GS 2	250 Hz	1	1
P₁ : 0,19 kW		RTD 1,2	500 Hz	10	10
I_N : 0,5 A		SAD 9	1 kHz	15	15
n : 1390 min ⁻¹			2 kHz	17	17
C_{400V} : - μ F			4 kHz	14	14
t_R : 50 °C			8 kHz	5	5

