



### EQ / ER 500-6A

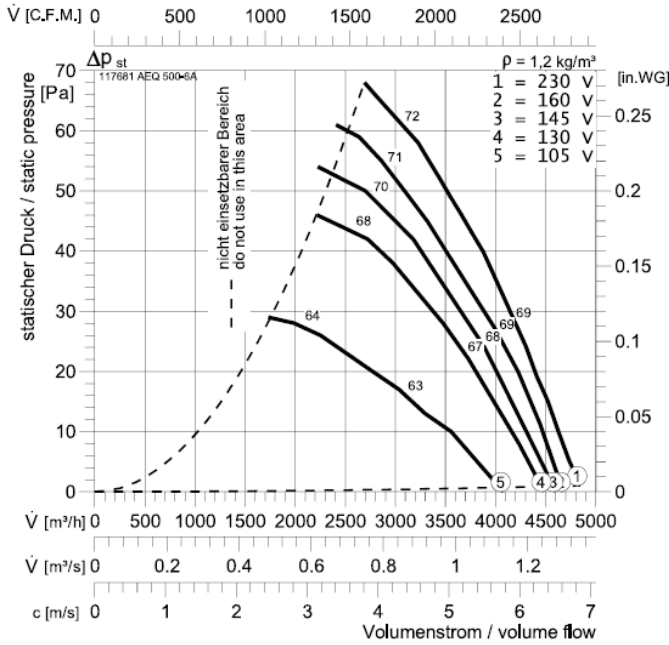

Typ : EQ / ER 500-6A	$I_A/I_N$ : 1,9	$\Delta\text{dB}$	$L_{\text{WA5}}$	$L_{\text{WA6}}$
Art.Nr.: 1017900061 / 0617900061	IP 44	$L_{\text{WA tot}}$	0	0
Weight : 17,4/18 kg	E13	125 Hz	-36	-36
U : 230 V 50 Hz	GS 2	250 Hz	-17	-17
$P_1$ : 0,21 kW	NE 1,5	500 Hz	-10	-10
$I_N$ : 1,03 A	RPE 02 A	1 kHz	-7	-7
n : 950 min <sup>-1</sup>		2 kHz	-4	-4
$C_{400V}$ : 6 $\mu\text{F}$		4 kHz	-9	-9
$t_R$ : 50 °C		8 kHz	-19	-19

### DQ / DR 500-6A

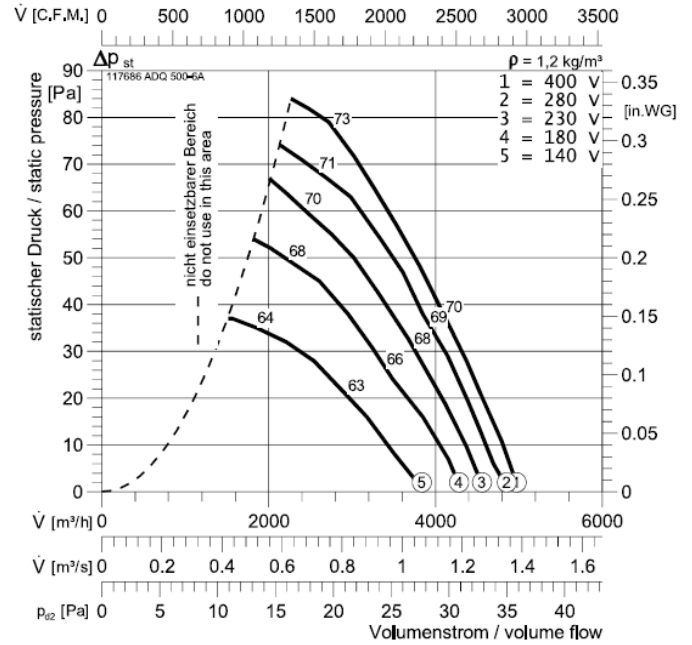

Typ : DQ / DR 500-6A	$I_A/I_N$ : 2,9	$\Delta\text{dB}$	$L_{\text{WA5}}$	$L_{\text{WA6}}$
Art.Nr.: 1017900062 / 0617900062	IP 44	$L_{\text{WA tot}}$	0	0
Weight : 9,5/9,5 kg	E13	125 Hz	-36	-36
U : 400 V 50 Hz	GS 2	250 Hz	-17	-17
$P_1$ : 0,22 kW	RTD 1,2	500 Hz	-10	-10
$I_N$ : 0,65 A	SAD 9	1 kHz	-7	-7
n : 950 min <sup>-1</sup>		2 kHz	-4	-4
$C_{400V}$ : - $\mu\text{F}$		4 kHz	-9	-9
$t_R$ : 50 °C		8 kHz	-19	-19

