



### EQ / ER 500-4A

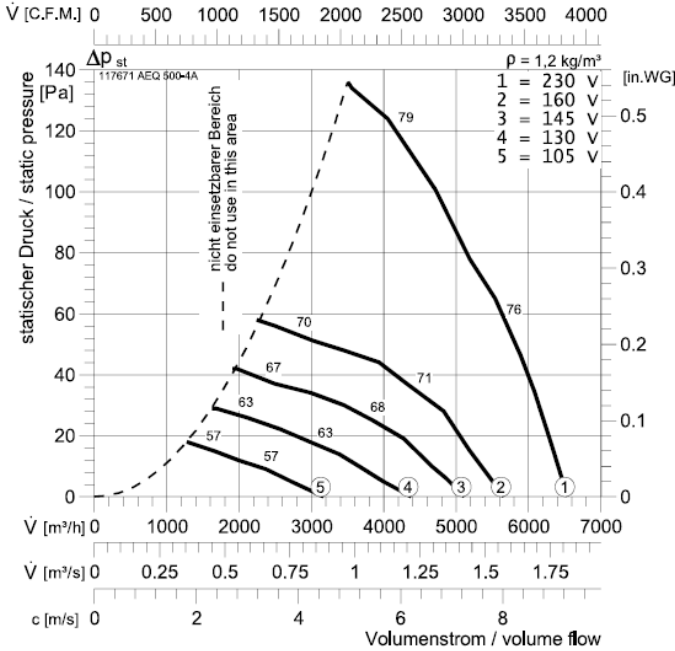

Typ : EQ / ER 500-4A	$I_A/I_N$ : 3,3	$\Delta dB$	$L_{WA5}$	$L_{WA6}$
Art.Nr.: 1017900063 / 0617900063	IP 44	$L_{WA \text{ tot}}$	0	0
$\square$ : 16,2/16,2 kg	E13	125 Hz	-37	-37
U : 230 V 50 Hz	GS 2	250 Hz	-20	-20
$P_1$ : 0,4 kW	NE 3,2	500 Hz	-9	-9
$I_N$ : 1,73 A	RPE 06 A	1 kHz	-6	-6
n : 1370 min <sup>-1</sup>		2 kHz	-5	-5
$C_{400V}$ : 12 $\mu F$		4 kHz	-8	-8
$t_R$ : 50 °C		8 kHz	-16	-16

### DQ / DR 500-4A

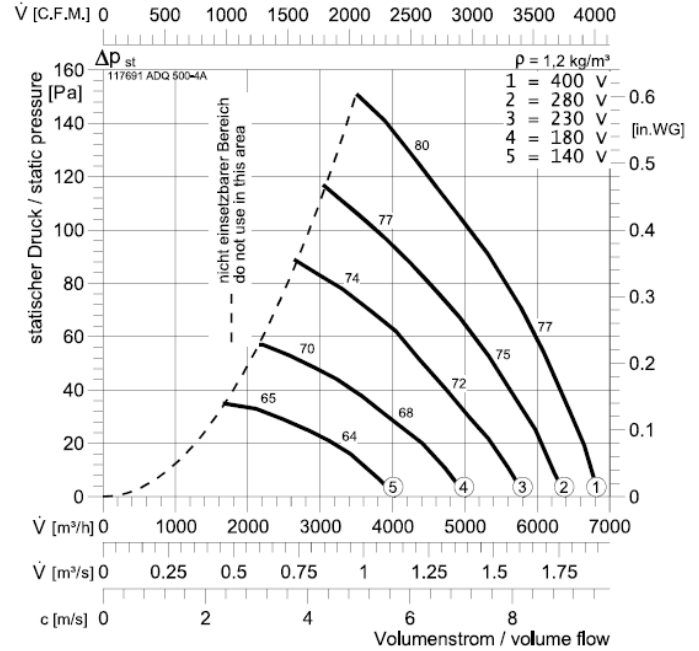

Typ : DQ / DR 500-4A	$I_A/I_N$ : 3,4	$\Delta dB$	$L_{WA5}$	$L_{WA6}$
Art.Nr.: 1017900064 / 0617900064	IP 44	$L_{WA \text{ tot}}$	0	0
$\square$ : 17,5/17,4 kg	DD0b	125 Hz	-37	-37
U : 400 V 50 Hz	GS 2	250 Hz	-20	-20
$P_1$ : 0,32 kW	RTD 1,2	500 Hz	-9	-9
$I_N$ : 0,83 A	SAD 9	1 kHz	-6	-6
n : 1365 min <sup>-1</sup>		2 kHz	-5	-5
$C_{400V}$ : - $\mu F$		4 kHz	-8	-8
$t_R$ : 50 °C		8 kHz	-16	-16

