


Abmessungen / Dimensions / Dimensioni

CA WE D/E - Serie


CA WE D

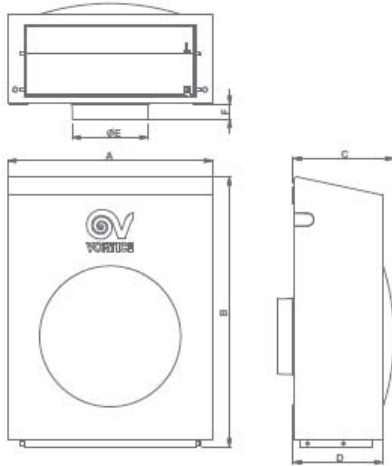

Models	A	B	C	D	ØE	F	G	Kg
CA 100 WE D	262	345	127	113	97	20	-	4.6
CA 125 WE D								
CA 150 Q WE D								
CA 150 WE D E	360	430	173	155	147	178.5	6.7	
CA 160 WE D E					157			
CA 200 WE D E					197			

Dimensions (mm)

CA WE D E

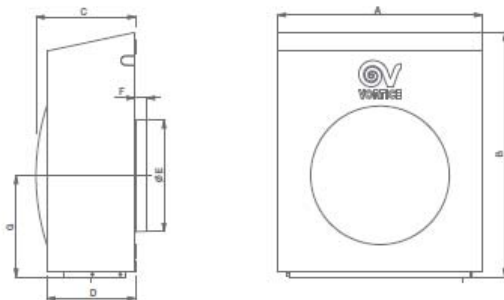

Masse / Dimensions / Dimensioni, mm

TECHNICAL DATA

Models	Code	W min/max	A min/max	RPM min/max	Max Airflow		Max Pressure		Lp dB(A) min/max	Max °C
					m³/h min/max	l/s min/max	mmH₂O min/max	Pa min/max		
CA 100 WE D	16091	60 - 80	0.26 - 0.35	1600 - 2380	200 - 330	56 - 92	29 - 37	284 - 363	38.3 - 50.1 (*)	60
CA 125 WE D	16092	60 - 80	0.26 - 0.35	1400 - 2325	215 - 380	60 - 106	30 - 39	294 - 383	36.3 - 49.5 (*)	60
CA 150 Q WE D	16093	60 - 80	0.26 - 0.35	1760 - 2350	220 - 400	61 - 111	25 - 36	245 - 353	37.1 - 49.5 (*)	60
CA 150 WE D E	16087	45 - 100	0.39 - 0.44	1230 - 2520	275 - 620	76 - 172	33 - 43	324 - 422	23.1 - 42.9 (**)	55
CA 160 WE D E	16088	45 - 100	0.39 - 0.44	1230 - 2520	280 - 660	78 - 183	36 - 45	353 - 441	22 - 37.5 (**)	55
CA 200 WE D E	16089	45 - 100	0.39 - 0.44	1310 - 2530	310 - 680	86 - 189	33 - 44	324 - 431	20.9 - 39.1 (**)	55

* Sound pressure level measured at 3 m in free field conditions with long-cased appliance in delivery mode in accordance with standard EN ISO 3741:2009.

** Sound pressure level measured at 3 m in free field conditions with long-cased appliance in delivery mode in accordance with standard EN ISO 9614.

Electrical supply: 230 V ~ 50 Hz for CA WE D E models.
Electrical supply: 220/240 V ~ 50 Hz for CA WE D models.

SOUND LEVELS

Models	Code	125	250	500	1000	2000	4000	8000
CA 100 WE D	16091	61.9	65.8	62.2	62.1	61	59.5	50.6
CA 125 WE D	16092	59.7	64.5	62	61.7	60.6	58.4	49.8
CA 150 Q WE D	16093	65	62.5	60.3	61.5	60.7	59.4	51.1